

VERSADECK

ground protection and access mats

VERSADECK™ mats both protect expensive turf and provide access and traction over sand, mud and other difficult surfaces. VERSADECK™ mats may be used to create temporary roadways for vehicles, truck and equipment or large work pads for drilling, administrative compounds, temporary flooring and other industrial applications.

Features



DURABLE PLASTIC CONSTRUCTION: Each VERSADECK™ sheet is molded using a high density material that makes the product extraordinarily strong with chemical and weather resistance. UV inhibitors are added, allowing VERSADECK™ to be used indoors and outdoors without the risk of fading or degradation.

CONVENIENT SIZE: VERSADECK™ ground protection mats are 2.4m long x 1.2m wide and are 12mm thick at the centre, with added tread patterns for greater traction and slip resistance. Pallets of VERSADECK™ can be double and triple stacked as needed.

SUPPORTS HEAVY WEIGHTS: Depending on the ground surface and the density of the subsurface, VERSADECK™ can be used to provide access for vehicles and equipment weighing up to 80 tons.

CONVENIENT CONNECTION SYSTEM: Each mat has connection holes at each corner and in the middle of the 2.4m side, allowing mats to be connected side by side or at 90 degree angles to each other. (Connectors are an Optional Extra)

COLOUR: VERSADECK™ is available as standard in a natural sand colour which reduces sunburn to grassed surfaces, and blends well environmentally.

OUTPERFORMS WOOD AND OTHER SYSTEMS: Unlike plywood, VERSADECK™ will not warp, rot, crack, or delaminate and there are no unsafe chemicals, such as arsenic, which exists in some treated plywood.

HANDLES: 2 handles down each 2.4m side for easy lifting.

GROUND SURFACE: VERSADECK mats are designed to be used with no ground preparation over grass, gravel, soil, concrete, asphalt, mud and sandy soil conditions.



1800 envirex

VERSADECK

ground protection and access mats

Hand Holes

4 Precision cut hand holes make 2 person maneuvering a breeze



Perfect Size

Each **VERSADECK** is 2.4m long x 1.2m wide and is 12mm thick with a 9mm cleat. Weighs 39Kg each.


Weight Loading

Varies, depending on sub-surface, up to 80 tons capacity.



More Rigid Construction

less flex on soft ground due to rugged overlapping 'checker' tread and virgin material.

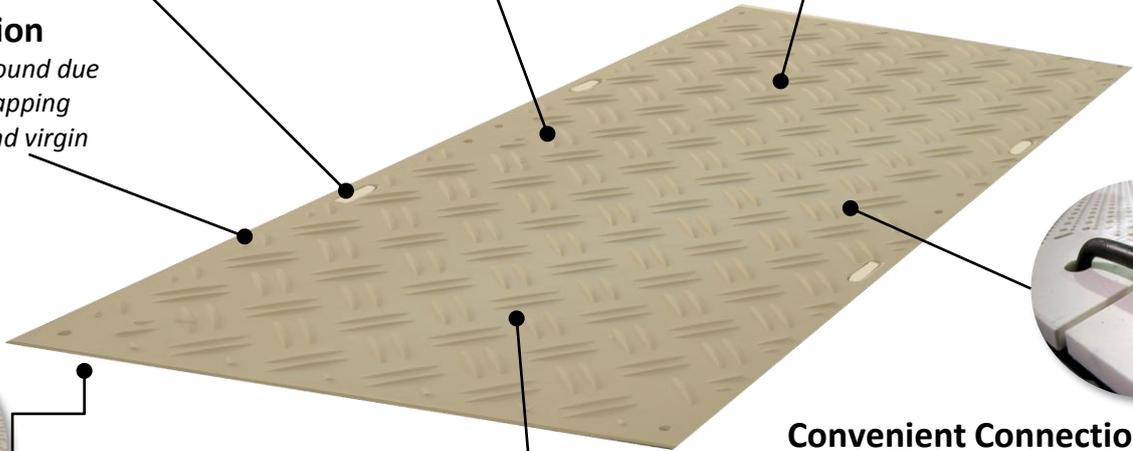

Convenient Connection System

Simply connect mats together with optional **VERSALINKS**.

Dual Tread Pattern

Best of 'both worlds' for pedestrians or machinery.

Natural Beige Colour

Less heat transfer to turf, and cooler to handle in full sun.

Temporary roadways



Pedestrian Pathways



Stadiums



Parking



Tracked Machines



Po Box 415, HAMILTON VIC 3300
E: info@envirex.com.au ABN: 57868 995 454

1800 envirex